

1CH ADJ Current-Limited Power Distribution Switch

Features

- ‡ Single-Channel Power Distribution Switch
- ‡ Programmable Current Limit in less than 2A Output Current
- ‡ Enable polarity: Active High
- ‡ 2.4V to 5.5V Supply Range
- ‡ Under-Voltage Lockout
- ‡ -40°C to +85°C Ambient Temperature Range
- ‡ Accurate Current Limit
- ‡ 15 A Quiescent Current
- ‡ 80m MOSFET
- ‡ Thermal-Shutdown Protection
- ‡ Built-In SoftStart
- ‡ Reverse Current Blocking (No Body Diode)
- ‡ Available in SOT23-5 Package


Applications

- ‡ Set-Top Boxes
- ‡ Wi-Fi Router/AP
- ‡ USB 3G Dataload/ USB Dongle
- ‡ High-Definition Digital TVs
- ‡ ONT Boxes
- ‡ USB Ports and Hubs, Laptops, and Desktops
- ‡ Smartphone and PDA
- ‡ MiniPCI Accessories

General Description

The EC6022 Power Distribution Switch features internal current limiting to prevent damage to host devices due to faulty load conditions. The EC6022 develops ultra-low on-resistance switch with programmable current limiting to protect the power source from over current and short circuit conditions. It integrates the over temperature protection and discharges the output capacitor during the shutdown. In case the output is pulled higher than the input voltage under the shutdown, the EC6022 can block the current flowing from the output to the input. The EC6022 is available in SOT23-5 package.

Typical Application Circuit

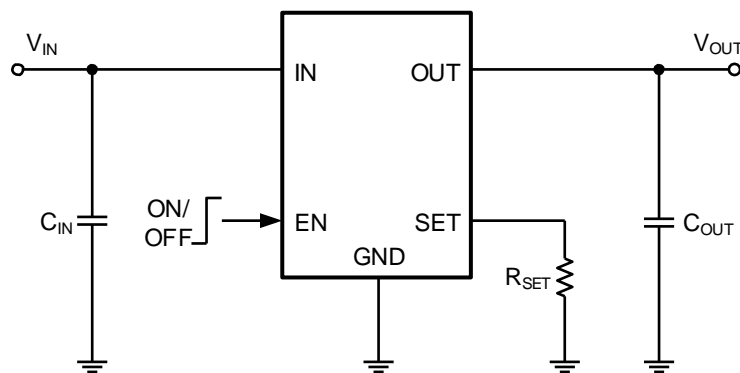


Basic Application Circuit

1CH ADJ Current-Limited Power Distribution Switch

Pin Description

Pin Configuration

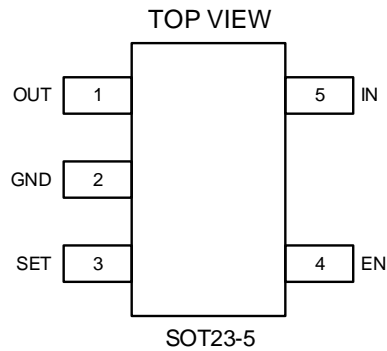

Top Marking: MEYLL (device code: ME, Y=yearcode, LL= lot number code)

Pin Description

Pin	Name	Function
1	OUT	Output Pin.
2	GND	Ground Pin.
3	SET	Current limit programming pin. Connect a resistor R_{SET} from this pin to GND to program the current limit.
4	EN	ON/OFF control. Pull high to enable IC, Do not float.
5	IN	Power Supply Pin

Order Information

Marking	Part No.	Model	Description	Package	MOQ
MEYLL	7070213	EC6022	EC6022 1CH Current Limited IC, V_{IN} 2.4V-5.5V, I_{LIM} ADJ, Active High, SOT23-5	SOT23-5	3000PCS



1CH ADJ Current-Limited Power Distribution Switch

Absolute Maximum Ratings ⁽¹⁾ ⁽²⁾ ⁽³⁾

All Pins Voltage $-0.3V$ to $+7V$
 Operating Virtual Junction (T_J) $-40^{\circ}C$ to $+150^{\circ}C$
 Ambient Temperature Operating Range (T_A) $-40^{\circ}C$ to $+85^{\circ}C$
 Storage Temperature Range (T_S) $-55^{\circ}C$ to $+150^{\circ}C$
 Lead Temperature (Soldering, 10s) (T_L) $+260^{\circ}C$
 Junction-to-ambient thermal resistance (R_{JA}) $200^{\circ}C/W$
 Junction-to-case thermal resistance (R_{JC}) $130^{\circ}C/W$

Note 1: Exceeding these ratings may damage the device.

Note 2: The device is not guaranteed to function outside of its operating conditions.

Note 3: J_A is measured in the natural convection at T_A = 25°C on a low effective single layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard. Pin 2 of SOT23-5 packages is the case position for J_C measurement.

Recommended Operating Conditions

Input Voltage Pin $+2.4V$ to $+5.5V$
 All Other Pins $0V$ to $+5.5V$
 Junction Temperature Range (T_J) $-40^{\circ}C$ to $+125^{\circ}C$
 Ambient Temperature Range (T_A) $-40^{\circ}C$ to $+85^{\circ}C$

Electrical Characteristics

(V_{IN} = 5V, C_L = 1 F, per channel, T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ.	Max	Unit
Input Voltage Range	V _{IN}		2.4		5.5	V
Shutdown Input Current	I _{SHDN}	Openload, IC Disabled		0.1	1	A
Quiescent Supply Current	I _Q	Openload, IC Enabled		15		A
FET RON	R _{DS(ON)1}			80		m
ENB Rising Threshold	V _{ENB(H)}		2			V
ENB Falling Threshold	V _{ENB(L)}				0.8	V
ENB Leakage	I _{ENB}	V _{ENB} = 5.5V			1	A
IN UVLO Threshold	V _{IN,UVLO}	Minimum Duty Cycle			2.3	V
IN UVLO Hysteresis	V _{IN,HYS}			0.1		V
Over Current Limit	I _{LIM}	R _{SET} = N	0.75	1.0	1.25	A
	I _{LIM(MIN)}			0.4		A
	I _{LIM(MAX)}			2		A
Turn-ON Time	T _{ON}	R _L		120		S
Turn-OFF Time	T _{OFF}	R _L = 10 Ω, C _L = 1 F		10		S
OUT Shutdown Discharge Resistance	R _{DIS}			150		
Thermal Shutdown Temperature	T _{SD}			130		•
Thermal Shutdown Hysteresis	T _{HYS}			20		•

1CH ADJ Current-Limited Power Distribution Switch

Typical Performance Characteristics (4) (5)

Note (4): Performance waveforms are tested on the evaluation board.

Note (5): $V_{IN} = 5V$, $C_{OUT} = 1\mu F$, $R_{SET} = 6.8k\Omega$, $T_A = +25^\circ C$, unless otherwise noted.


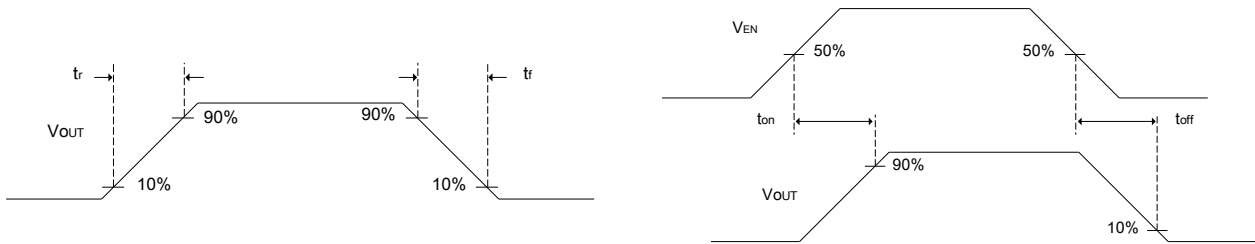


Figure 1 Tr, Tf, Ton, Toff waveforms


Turn on Delay vs. Input Voltage

$V_{EN} = 5V$, $R_{LOAD} = 5\Omega$

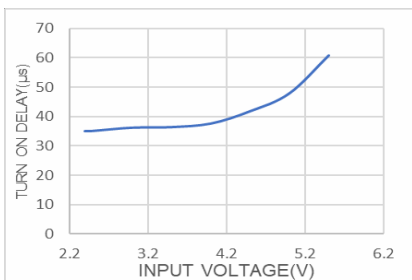


Turn off Delay vs. Input Voltage

$V_{EN} = 5V$, $R_{LOAD} = 5\Omega$

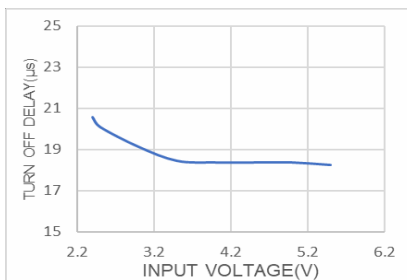


Supply Current, Output Enabled vs. Input Voltage

$V_{EN} = 5V$

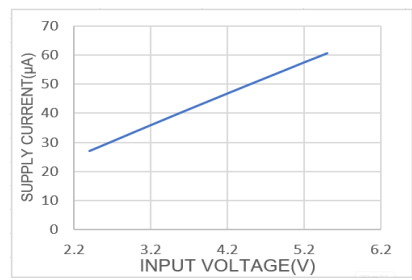


Supply Current, Output Disabled vs. Input Voltage

$V_{EN} = 0V$

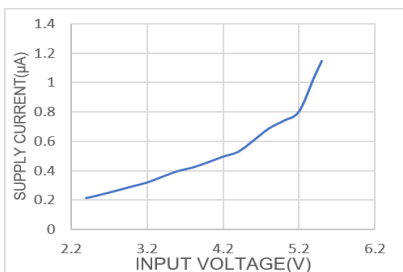


Static Drain-Source On-State Resistance vs. Input Voltage

$V_{EN} = 5V$, $I_{LOAD} = 0.5A$

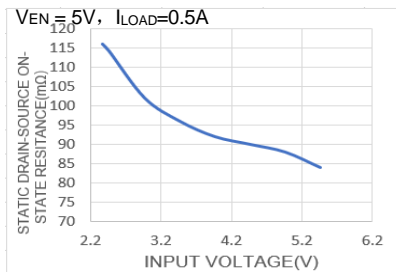


Input to Output Voltage vs. Load Current

$V_{EN} = 5V$

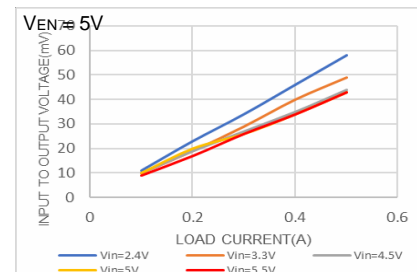


1CH ADJ Current-Limited Power Distribution Switch


Current Limit vs. Input Voltage

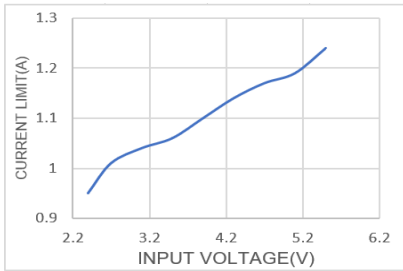

Threshold Trip Current vs. Input Voltage

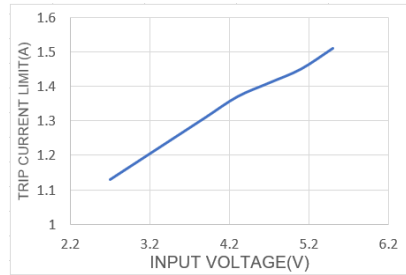


Current Limit vs. R_{SET}

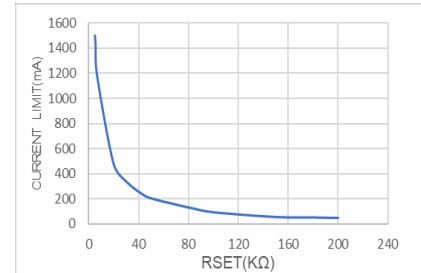


Turn on Delay Rise Time


V_{EN} = 5V, R_{LOAD}=5Ω

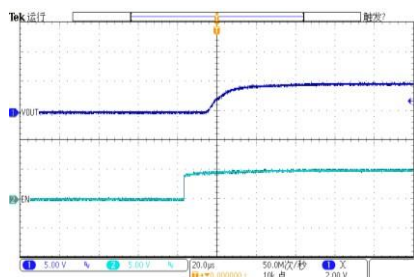


Turn off Delay Fall Time

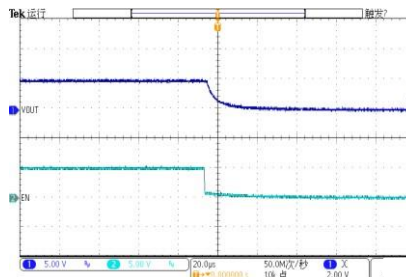


Threshold Trip Current with Ramped Load Enabled Device

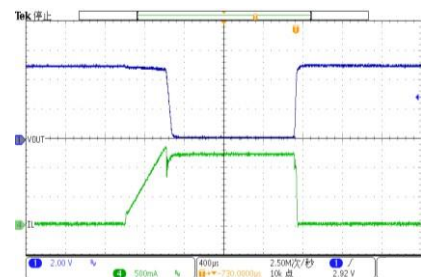

1Ω Load Connected to Enabled Device

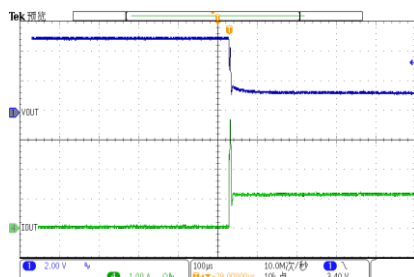


Short Circuit Current, Device Enabled into Short

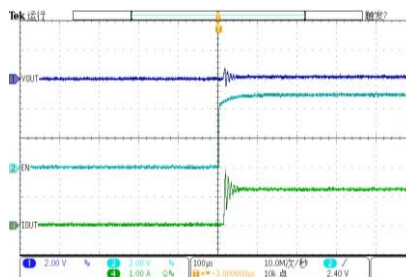

Current Limit vs. R_{SET}

I_{LIM}=0.4~1.5A

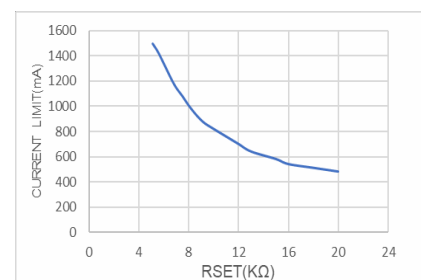

1CH ADJ Current-Limited Power Distribution Switch

Function Block Diagram

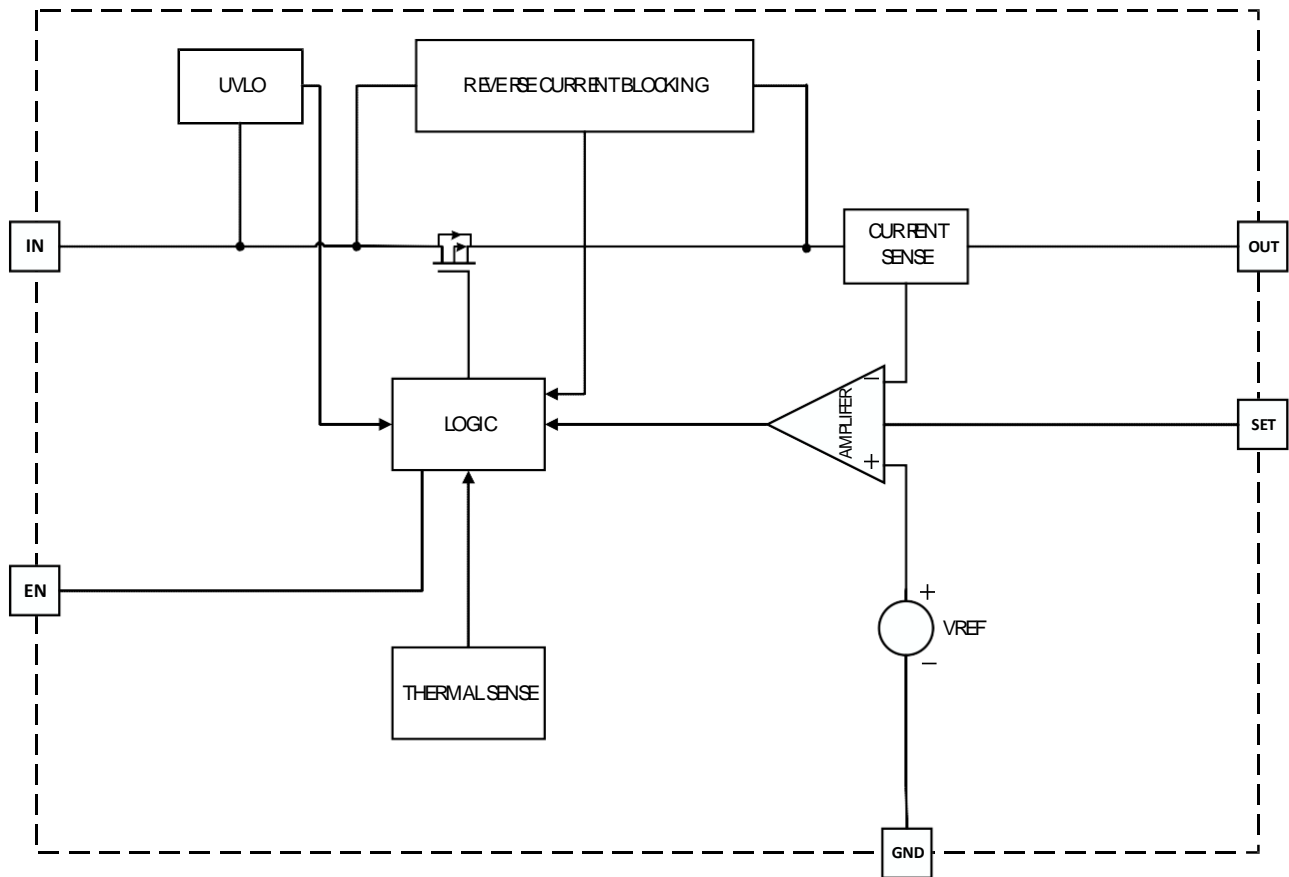


Figure 2 Function Block Diagram

1CH ADJ Current-Limited Power Distribution Switch

Functions Description

Current Limit

The EC6022 provides a constant current limit that can be programmed by an external resistor. Once the device reaches its current limit threshold, the internal circuit regulates the gate voltage to hold the current in the power MOSFET constant. Below table can be taken as a reference to choose R_{SET} to set the current limit threshold.

$R_{SET}(k)$	Typical Current Limit (mA)
5.1	1500
5.6	1420
6.8	1180
7.5	1080
8.2	980
9.1	880
10	820
11	760
12	700
13	640
15	580
16	540
18	510
20	480
30	340
43	238
51	202
68	160
82	128
100	94
150	56
180	52
200	48

Table 1 Current Limit Threshold Setting

Over Current

When the load exceeds trip current (minimum threshold current triggering constant-current mode) or short circuited, EC6022 switches into to constant-current mode (current limit value). EC6022 will be shutdown only if the overcurrent condition stays long enough to trigger thermal protection.

Trigger overcurrent protection for different overload conditions occurring in applications:

- 1) The output has been shorted or overloaded before the device is enabled or input applied. EC6022 detects the short or overload and immediately switches into a constant-current mode.
- 2) A short or an overload occurs after the device is enabled. The device switches into constant current mode after the current-limit circuit has been tripped (reached the trip current threshold). However, high current may flow for a

1CH ADJ Current-Limited Power Distribution Switch

short period of time before the current-limit circuit can read.

3) Output current has been gradually increased beyond the recommended operating current. The load current rises until the trip current threshold is reached or until the thermal limit of the device is exceeded. Once the trip threshold has been reached, the device switches into its constant-current mode.

Thermal Protection

If the current limit block starts to regulate the output current, the power loss on power MOSFET will cause the IC temperature rise. The die temperature is internally monitored until the thermal limit is reached. Once this temperature is reached, the switch will turn off to allow the chip to cool until the over temperature fault remove. The over temperature threshold is • and hysteresis is •

Under-voltage Lockout (UVLO)

This circuit is used to monitor the input voltage to ensure that the EC6022 is operating correctly. This UVLO circuit also ensures that there is no operation until the input voltage reaches the minimum spec.

Reverse Current Blocking

In case the output is pulled higher than the input voltage under the shutdown, the EC6022 can block the current flowing from the output to the input. This prevents damage to devices on the input side of the EC6022 by preventing significant current from sinking into the input capacitance.


Output Discharge

EC6022 has output discharge function. It can discharge the output capacitor by internal pull down resistance during shutdown.

1CH ADJ Current-Limited Power Distribution Switch

Package Description

SOT23-5

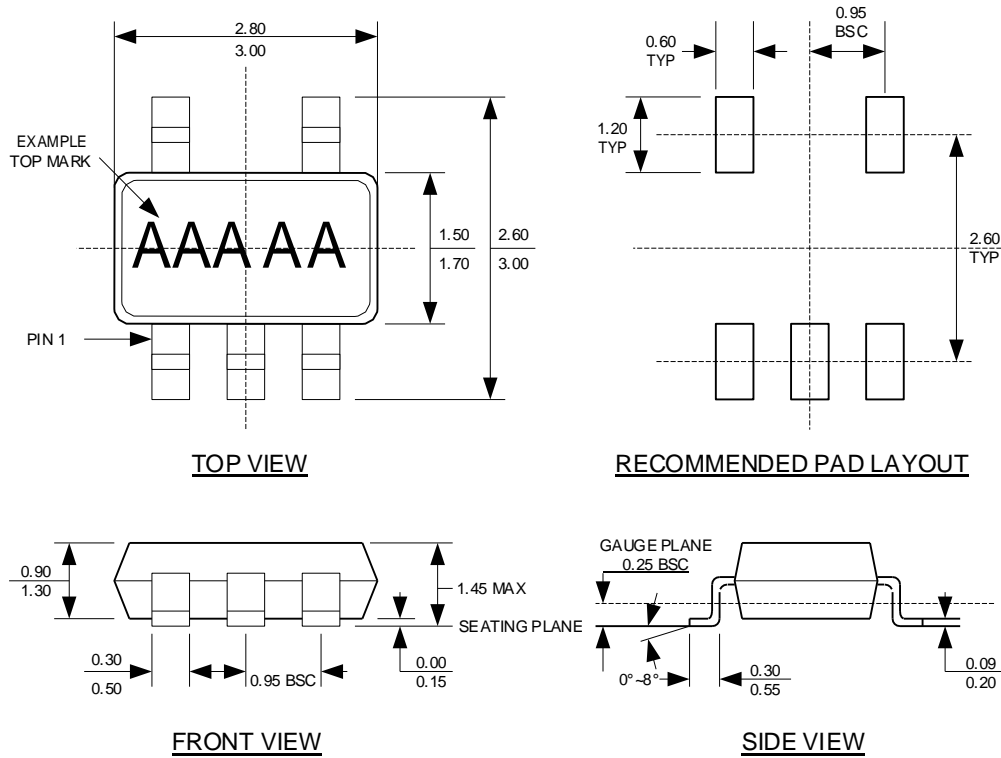

NOTE:

1. CONTROL DIMENSION IS IN INCHES. DIMENSION IN BRACKET IS IN MILLIMETERS.
2. PACKAGE LENGTH DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
3. PACKAGE WIDTH DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.
4. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.004" INCHES MAX.
5. DRAWING CONFORMS TO JEDEC MS-012, VARIATION BA.
6. DRAWING IS NOT TO SCALE.